
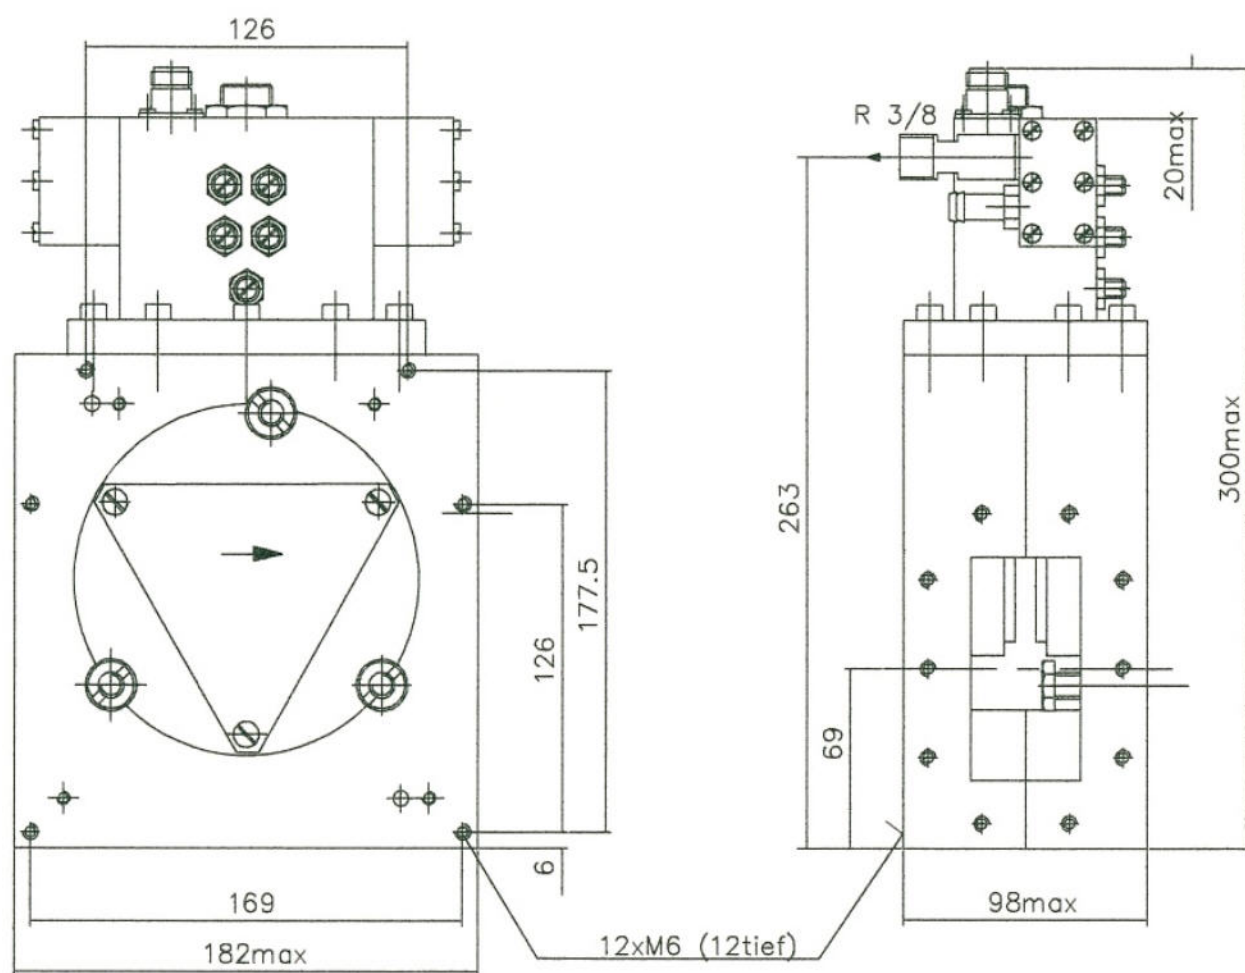


MICROWAVE ISOLATOR

WG340IS3

3.0KW/2450MHz/WR340

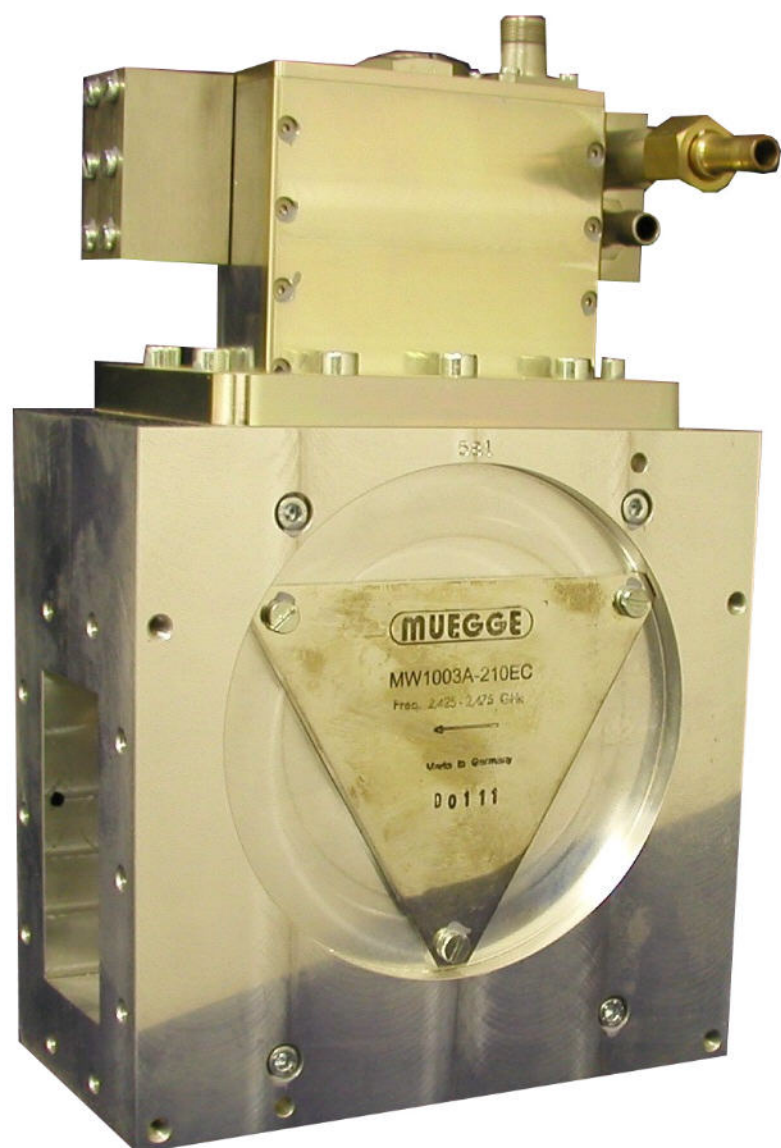

Specifications:

- Frequency	: 2425...2475MHz	- Temp. range	: 10...+50°C (max. 40°C water inlet)
- Return loss (Input& Output)	: min 23dB (matched counter port) : min 14dB (counter port shortcircuited)	- Monitor coupling	: 66.5 +/- 1dB
- Insertion Loss	: max 0.2dB	- Connectors	: Flange IEC PDR 26
- Isolation	: min 23dB	Monitor	: N (1 x female)
- Power (forward)	: 3000W cw	- Dimensions	: 182x300x98 mm
- Power (reflected)	: 3000W cw		